TACOMA 6' X 8'

Apply a small amount of adhesive to backside of U-Channels (against post) to hold in place if needed.
Use a small teardrop of glue in the inside corners of cap (sold separately).

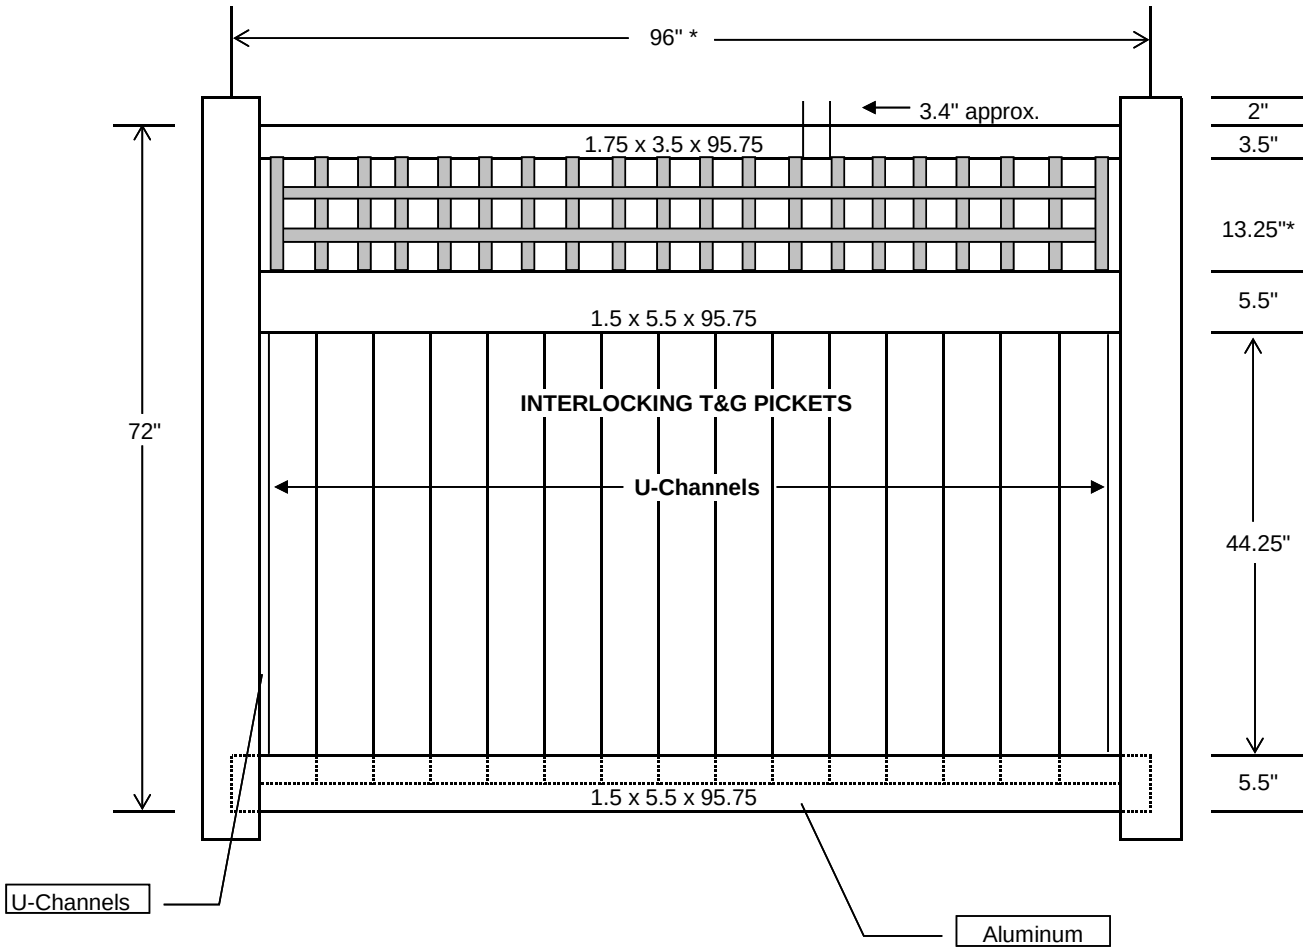

Material List

Qty	Item	Dimension	WRHS USE ONLY
1	Top Rail	1-3/4" x 3-1/2" x 95-3/4"*	1-3/4" x 3-1/2" x 8' Rail
1	Mid Rail	1-1/2" x 5-1/2" x 95-3/4"*	1-1/2" x 5-1/2" x 8' Rail
1	Bottom Rail	1-1/2" x 5-1/2 " x 95-3/4"*	1-1/2" x 5-1/2" x 8' Rail
1	Aluminum	1-1/4" x 1-3/4" x 95-3/4"*	1-1/4" x 1-3/4" x 8"*
2	U Channels	1-1/8" x 1-1/4" x 44-1/4"*	48-1/2" U Channel
15	T&G Pickets	7/8" x 6" x 47-3/4"*	7/8" x 6" x 52" T&G
2	Pickets	7/8" x 1-1/2 " x 89-1/2"*	7/8" x 1-1/2 " x 16'
2	End Spindles	1-1/4" x 1-1/4" x 16-3/4"*	1-1/4" x 1-1/4" x 192"
18	Spindles	1-1/4" x 1-1/4" x 16-3/4"*	1-1/4" x 1-1/4" x 192"

* Actual measurements may vary
* Panel should be installed 2" off ground

PWPR-SQLAT-6X8